





## Airfield Halogen Bipin

	<b>Type 6112 LL</b> <b>6,6A 30W GZ9,5</b>
	<b>Ordering - No.</b> <b>9230.751.85931</b>
<b>Product description</b>	Halogen Airfield Lamp with Bi-pin base
<b>Features</b>	high and constant lumen output, long lifetime, small size
<b>Applications</b>	Approach lights Threshold lights Runway lights Taxiway lights Obstruction lights

### Drawing (in mm)

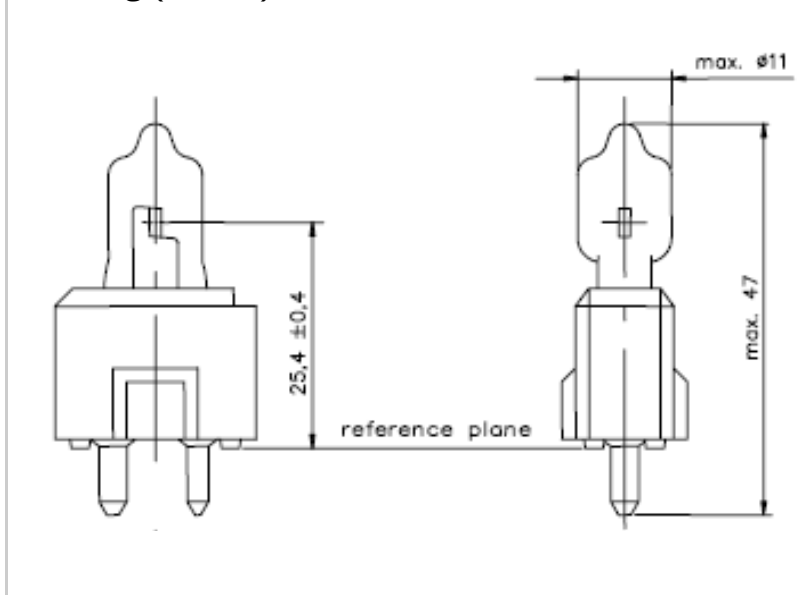

### Technical Details

Rated current (A)	6,6
Wattage (W)	30 +/- 10%
Luminous flux (Lm)	375 +/- 10%
Lumen maintenance	min. 90% after 1500 h
Average lifetime (hours)	2000
Base	GZ9,5
Cable connector	-
Cable length (mm)	-
Maximum Overall Length (mm)	max. 47
Bulb Diameter (mm)	max. 11
Light Center Length (mm)	25,4 +/- 0,4
Maximum allowed cable temperature (°C)	-
Maximum allowed pinch temperature (°C)	350
Filament Type	C-8
Burning Position	S
Chromaticity	Within white boundaries
Packaging quantity	100 pcs.
Environmental remark	 Product don't contain lead or mercury and is conform with Directive 2002/95/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

valid from	31.03.2011—V3—PN11/0085
replace for	08.07.2008
file	9230/751/85900100.pub